


IP400/500/600 TECHNICAL SPECIFICATION

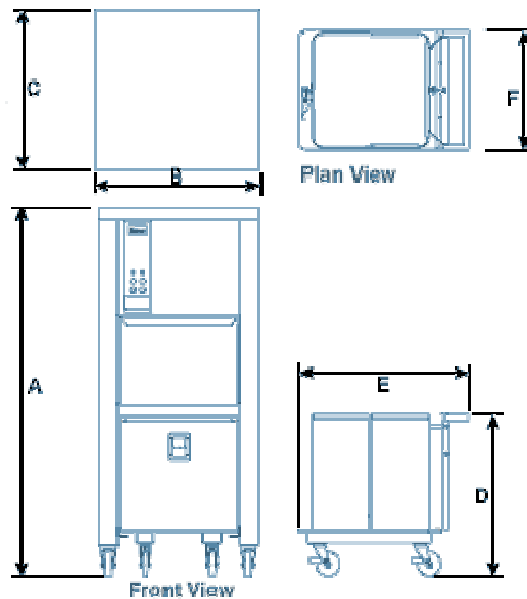

	IP400	IP500	IP600
Average Compacted Bag Weight	16-18kg	25-30kg	40-45kg
Average Compacted Package	375x375x380mm 55 litre	500x500x430mm 110 litre	600x600x580mm 210 litre
Compaction Force & Ratio (approx)	3000kgf 5:1	4500kgf 5:1	5000kgf 5:1
Cycle Time	14 seconds	23 seconds	23 seconds
Motor	0.75kW (1HP)		
Voltages	240-1-50		
Controls	24V		
Fuse Ratings	13A		
Safety	safety interlocks on trolley & safety chute		
Indicator lights	machine run, bag full		
	STANDARD EQUIPMENT		
	trolley, s/s bag liners, 100 plastic bags & tying tool		
	OPTIONAL EQUIPMENT		
	additional trolley, plastic bags, deck feet for shipboard installation, Lift-A-Pak		

Model	A	B	C	D	E	F
IP400	1645	600	580	600	530	410
IP500	1740	678	675	730	765	520
IP600	1930	870	840	845	885	620

Or get a copy from

<http://www.imco.co.uk/layouts/tech-spec-waste-compactors.html>